



ABOUT US

Zhengyi windows and doors, the brand was founded in 2008. It is an innovative company that specializes in high-end customized system window and door products and services. Now our capacity reaches to 3000sqm/month.

We focus on quality first and service first dedicated to building a leading brand in the industry for safety window and doors. Our mission is to enable millions of families to enjoy the beautiful life brought by windows and doors. In future, we are willing to work together with more like-minded people to develop, continuously improve, and strive to bring more and better system to everyone.

Zhengyi has a group of high-level design teams, senior & technicians, and excellent management personnel. Our main products including aluminum French style windows and doors, Slim sliding doors, Folding door, casement windows and doors, Entrance door. Zhengyi doors and windows focus on building the value of living space and provide consumers with a one-stop five-star services



SES 65 French Style
Window and Door
System



High-performance Windows and Doors System

PRODUCT FEATURES

1. Depth 66mm, thickness 2.0mm
2. Opening way: Outward, inward, tilt-turn window, top hung window and so on.
3. Applicated in window or door.
4. Optional with screen sash.
5. Sealing process: Multi EPDM gasket sealing process with anti-shrinkage design make the sealing performance stronger and more stable.
6. Symmetrical, stable structural design with identical corner and T connectors.
7. One sash can be reached 120kg with designed accessories.

PARAMETER



wind load
Grade 9

R_f (GB/T8478)



Water tightness
Grade 6

ΔP (GB/T8478)



Air Permeability
Grade 6

q_1 / q_2 (GB/T8478)



Insulation
Grade 6


K (GB/T8478)



Soundproofing
Grade 5


$R_w + C_w$

PRODUCT NODES



THERMALINSULATION

$U_w=2.0-2.5w/ (m^2.k)$





SE 65 Inward
Opening Window
and Door System

High-performance Windows and Doors System

PRODUCT FEATURES

1. Depth 66mm, thickness 2.0mm or 1.6mm
2. Opening way: Outward, inward, tilt-turn window, top hung window and so on.
3. Applicated in window or door.
4. Multi chamber structures for better insulation and sound insulating performance.
5. Security protection with multi point lock.
6. Symmetrical, stable structural design with identical corner and T connectors. The max height reached 5000mm.
7. One sash can be reached 150kg with customized accessories.

PARAMETER



wind load
Grade 9

R_f (GB/T8478)



Water tightness
Grade 6

ΔP (GB/T8478)



Air Permeability
Grade 6

q_1 / q_2 (GB/T8478)



Insulation
Grade 6


K (GB/T8478)




Soundproofing
Grade 5

$R_w + C_w$

PRODUCT NODES



THERMAL INSULATION
 $U_w = 2.0 - 2.5 \text{ w / (m}^2 \cdot \text{k) }$





SE 75 Outward
Opening Window
and Door System



High-performance Windows and Doors System

PRODUCT FEATURES

1. Depth 75mm, thickness 2.0mm
2. Opening way: Outward, inward, tilt-turn window, top hung window and so on.
3. Applicated in window or door.
4. Anti-falling guarantee
5. Multi chamber structures for better insulation and sound insulating performance.
6. Symmetrical, stable structural design with identical corner and T connectors. The max height reached 5500mm.
7. One sash can be reached 200kg with customized accessories.

PARAMETER



wind load
Grade 9

R_f (GB/T8478)



Water tightness
Grade 6

ΔP (GB/T8478)



Air Permeability
Grade 7

q_v / q_a (GB/T8478)



Insulation
Grade 7


K (GB/T8478)



Soundproofing
Grade 6


$R_w + C_w$

PRODUCT NODES



THERMAL INSULATION

$U_w = 1.6 - 2.0 \text{ W} / (\text{m}^2 \cdot \text{K})$





SE 120 Integrated
Window and Door
System With Screen



High-performance Windows and Doors System

PRODUCT FEATURES

1. Depth 120mm, thickness 2.0mm
2. Opening way: Outward for glass sash, inward for screen. Smart electronic opener can be option.
3. Applied in window or door.
4. Multi chamber structures for better insulation and sound insulating performance.
5. Sealing process: The opening part adopts hidden drainage and has high watertight performance.
6. Symmetrical, stable structural design with identical corner and T connectors. The max height reached 5500mm.
7. Standard glass specification as 5mm+27A+5mm
8. One sash can be reached 120kg with customized accessories.

PARAMETER



wind load
Grade 9

R_L (GB/T8478)



Water tightness
Grade 6

ΔP (GB/T8478)



Air Permeability
Grade 7

q_1 / q_2 (GB/T8478)



Insulation
Grade 6



K (GB/T8478)



Soundproofing
Grade 6


$R_w + C_w$

PRODUCT NODES



THERMALINSULATION

$U_w = 2.0 - 2.5 \text{ w/ (m}^2 \cdot \text{k)}$





SE 120S Sliding Window System



High-performance Windows and Doors System

PRODUCT FEATURES

1. Depth 120mm, thickness 1.6mm
2. Simple and lightweight appearance: The overall appearance is beautiful and simple, without taking up indoor and outdoor space, harmoniously blending with the architectural space. taking up indoor and outdoor
3. Automatic lock can be self-lock.
4. Special sliding components: Stainless steel rails, which are smooth durable for pushing and pulling;
5. Systematic drainage design: The series design of lower frame stepped drainage structure, the outdoor independent track, and the wind pressure-resistant drainage hole cap make the drainage of doors and windows smoothest, and improves the processing efficiency and optimizes the cost.
- 6 The max height for one sash is 2000mm and weight can be reached to 80kg/sash

PARAMETER



wind load
Grade 9

R_f (GB/T8478)



Water tightness
Grade 6

ΔP (GB/T8478)



Air Permeability
Grade 7

q_1 / q_2 (GB/T8478)



Insulation
Grade 3


K (GB/T8478)



Soundproofing
Grade 3

$R_w + C_p$

PRODUCT NODES

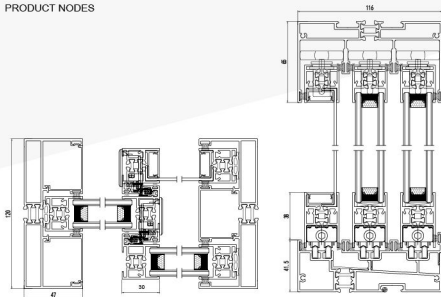



SE 70 Panorama Sliding and Folding Door System



High-performance Windows and Doors System

PRODUCT FEATURES

- 1.Depth 120mm, thickness 1.8mm
- 2.Patterned design for door and accessories, door sash can be slide, folding.
- 3.Unlimited width system Opening area 95%
- 4.Interlocking tongue-and-groove for superior seal and security
- 5.Concealed multi-point locking system for ease of operation and security
- 6.Thermally Efficient, thermal breaking strip 20mm
- 7.Add a screen system for year-round comfort and protection
- 8.The max height is 3000mm, the max width 7500mm. Max weight for one sash 80kg.

PARAMETER



wind load
Grade 9

R_f (GB/T8478)



Water tightness
Grade 5

ΔP (GB/T8478)



Air Permeability
Grade 6

q_1 / q_2 (GB/T8478)



Insulation
Grade 6


K (GB/T8478)



Soundproofing
Grade 5


$R_w + C_w$

PRODUCT NODES




THERMALINSULATION

$U_w = 2.0 - 2.5 \text{ w / (m}^2 \cdot \text{k)}$





SEF 68 Folding System



High-performance Windows and Doors System

PRODUCT FEATURES

1. Depth 77mm, thickness 2.0mm
2. Appearance: Large-scale opening of openings can be achieved, allowing for a natural blend of indoor and outdoor spaces, allowing for easy conversion.
3. Comfortable stainless steel double track, and special pulley kit for folding slide door, with stable and durable performance.
4. Concealed hinge system for anti-pinch hand design.
5. Safety: The opening part of the frame sash adopts an anti-pinch hand sealing design, effectively avoiding safety hazards.
6. Multiple opening combinations: It can realize outward and inward folding, push-pull; Multiple opening combinations are available at the same time.
7. The max height is 3500mm, the max weight for one sash 100kg.

PARAMETER



wind load
Grade 9

R₁ (GB/T8478)



Water tightness
Grade 5

ΔP (GB/T8478)



Air Permeability
Grade 5

q_1 / q_2 (GB/T8478)



Insulation
Grade 5




K (GB/T8478)



Soundproofing
Grade 5

$R_{w} + C_{p}$

PRODUCT NODES





SEE 90 Front Door System

High-performance Windows and Doors System

PRODUCT FEATURES

1. Entrance door thermal break system
2. Flat surface inside and out with a sheet depth of 91mm
3. Thickness of aluminum sheet 4mm inside and out
4. Excellent performance in waterproofing, thermal and sound insulation.
5. Possibility of using anti-bi-metal type polyamides.
6. Ability to apply personality designs.
7. Ideal for use with biometric security systems.
8. Max height 5500mm, max weight 500kg/sash.

PARAMETER



wind load
Grade 9

R_f (GB/T8478)



Water tightness
Grade 6

ΔP (GB/T8478)



Air Permeability
Grade 6

q_1 / q_2 (GB/T8478)



Insulation
Grade 8


K (GB/T8478)



Soundproofing
Grade 6


$R_{w} + C_e$

PRODUCT NOTES




THERMAL INSULATION

$U_w = 2.0 - 2.5 w / (m^2 \cdot k)$





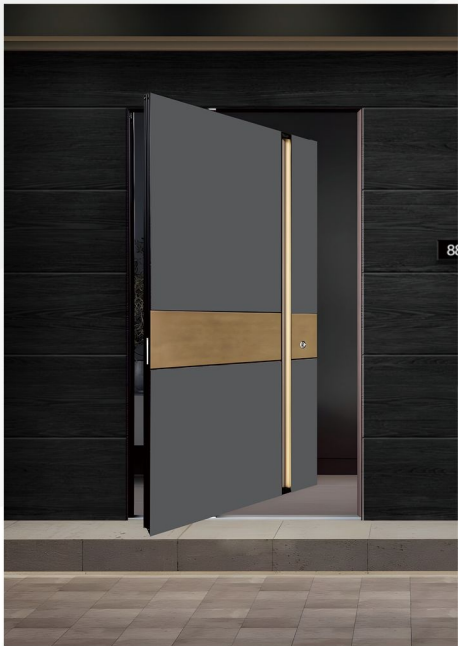



SEP 100 Swing Door System

High-performance Windows and Doors System

PRODUCT FEATURES

- 1.Depth 100mm, thickness 2.0mm
- 2.Customized handle.
- 3.Applicated in commercial door.
- 4.Thermal break system, Thermal break strip 14.8mm
- 5.The max height 4500mm
- 6.Glass specification 5mm+12A+5mm
- 7.The max weight 300kg/sash with customized accessories.

PARAMETER



wind load
Grade 9

R_f (GB/T8478)



Water tightness

ΔP (GB/T8478)



Air Permeability

q_1 / q_2 (GB/T8478)



Insulation


K (GB/T8478)



Soundproofing

$R_w + C_p$

PRODUCT NODES





SES 80 Sliding Door System



High-performance Windows and Doors System


PRODUCT FEATURES

1. Depth 130mm/2 tracks, 197mm/3tracks, 264mm/4 tracks, 331mm/5tracks, 398mm/6tracks. Thickness 2.0mm
2. Ultra large open field of view: The sliding sash can achieve a width of 3.0 meters per sash, providing ultimate ventilation and a wide field of view
3. Optional with screen and difference combines.
4. Special sliding components: Stainless steel rails, which are smooth durable for pushing and pulling;
5. Efficient hidden drainage: Systematic drainage design, adapting to hidden drainage system, optimizing drainage performance, and ensuring beautiful products.
6. Upper grade accessories can be optional. 150kg/300 kg lifting and sliding accessories
7. Multi-point lock system.
8. Max height 3500mm, max weight 200kg/sash.

PARAMETER

				
wind load Grade 9	Water tightness Grade 3	Air Permeability Grade 3	Insulation Grade 3	Soundproofing Grade 3
R_f (GB/T8478)	ΔP (GB/T8478)	q_1 / q_2 (GB/T8478)	K (GB/T8478)	$R_w + C_p$

PRODUCT NODES

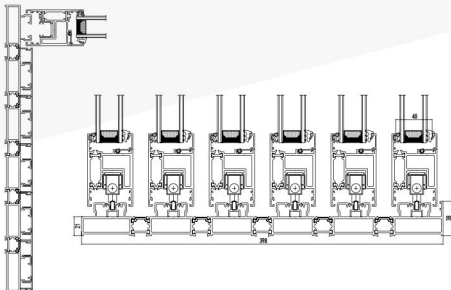



SES 52 Casement System



High-performance Windows and Doors System



SEC 52 Panorama
Casement Windows
and Door System

High-performance Windows and Doors System

PRODUCT FEATURES

- 1.Depth 52mm, thickness 1.4mm and 1.7mm
2. Opening way: Outward, inward, tilt-turn window, top hung window and so on.
3. Appearance: Large-scale opening of openings can be achieved, allowing for a natural blend of indoor and outdoor spaces, allowing for easy conversion.
- 4.One sash can be reached 100kg

PARAMETER



wind load
Grade 9

R_L (GB/T8478)



Water tightness
Grade 6

ΔP (GB/T8478)



Air Permeability
Grade 6

q_1 / q_2 (GB/T8478)



Insulation
Grade 3


K (GB/T8478)



Soundproofing
Grade 4

$R_w + C_w$

PRODUCT NODES





SES 80N Sliding Door System



High-performance Windows and Doors System

PRODUCT FEATURES

- 1.Depth 130mm/2 tracks, 197mm/3tracks,. Thickness 2.0mm
- 2.Optional with screen and difference combination.
- 3.Special sliding components: Stainless steel rails, which are smooth durable for pushing and pulling;
- 4.Multi-points lock system
- 5.Hided drainage design
- 6.Upper grade accessories can be optional. 150kg lifting and sliding accessories.
- 7.Glass groove 5mm+20A+5mm.
- 8.Max height 3500mm, max weight 200kg/sash

PARAMETER



wind load
Grade 9

R_f (GB/T8478)



Water tightness
Grade 3

ΔP (GB/T8478)



Air Permeability
Grade 3

q_1 / q_2 (GB/T8478)



Insulation
Grade 3




K (GB/T8478)



Soundproofing
Grade 4

$R_w + C_w$

PRODUCT NODES





LM75 Casement Window System



High-performance Windows and Doors System

PRODUCT FEATURES

1. Depth 75mm, thickness 2.0mm
2. wood surface can be optional,
3. Applicate in window or door
4. Optional screen and screen can be removed for cleaning.
5. Multi chamber structures for better insulation and sound insulating performance.
6. One sash can be reached 150kg with customized accessories.
7. Opening way: Outward, inward, tilt-turn window, top hung window and so on.
8. Max height 3500mm, max weight 200kg/sash

PARAMETER



wind load
Grade 9

R (GB/T8478)



Water tightness
Grade 6

ΔP (GB/T8478)



Air Permeability
Grade 6

q_1 / q_2 (GB/T8478)



Insulation
Grade 6


K (GB/T8478)



Soundproofing
Grade 6

$R_w + C_e$

PRODUCT NODES



THERMALINSULATION
 $U_w = 2.0 - 2.5 \text{ w} / (\text{m}^2 \cdot \text{k})$





LM80 Sliding Door System

High-performance Windows and Doors System

PRODUCT FEATURES

1. 2 tracks with 155mm width, can be 6 tracks. Alum thickness 2.0mm

2. Wood can be option,

3. Stainless steel tracks

4. Multi-point lock

5. Lifting and sliding accessories can be choose

6. Glass groove 5mm+20A+5mm

7. Max height 3500mm, one sash can be reached 150kg

PARAMETER



wind load
Grade 9

R_L (GB/T8478)



Water tightness
Grade 4

ΔP (GB/T8478)



Air Permeability
Grade 4

q_1 / q_2 (GB/T8478)



Insulation
Grade 3


K (GB/T8478)



Soundproofing
Grade 4

$R_w + C_p$

PRODUCT NODES

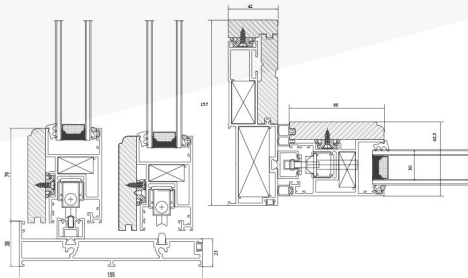

Foshan Zhengyi Doors And Windows Co.,Ltd.

Address: No.1 Gangtuo Road,Shiling, Shishan,
Nanhai,Foshan, Guangdong, China

whatsApp:+8613902805368,

E-mail box: zywindoor@gmail.com