



DOOR AND WINDOWS DETAILS



CONTENT



1

**Products
introduction**

2

Details

3

Other

4

Service range/Packing



A large teal-colored shape on the left side of the slide, consisting of a vertical rectangle and a horizontal rectangle extending from its base to the left.

01

PART

A solid orange square in the top right corner of the slide.

PRODUCT INTRODUCTION

Private custom doors and windows

PRODUCT INTRODUCTION

We have more than 40 doors and window systems, including casement windows, thermal break casement windows, thermal break windows with built-in net panels, sliding windows, single/ double hung windows, shutters and other window types, as well as swing doors, folding doors, sliding doors, floor spring doors and so on. In addition, we have clear / hidden frame curtain wall series. If you have any troubles selecting doors or windows, choose us, and we will provide you with the best solution.



PRODUCT INTRODUCTION

Hardware

With imported hinges and human mechanics design, our hardware have a long life expectancy



Color options

Eight colors available



30 HAND OPERATED FLAT SHUTTER SERIES

Profiles wall thickness 1.4mm, frame section width 30mm, louvers width 88mm, opening panels section width 65mm. It opens either inside or outside and the louvers could be glass if required. It is non thermal break system and the width range for opening panels is 400-850mm while height no more than 1500mm.





40 HAND OPERATED SHUTTER SERIES









70 BURLAR PROOF GLASS SHUTTER SERIES

With imported hinges and human mechanics design, our hardware have a long life expectancy.

By switching the handle at different angles, you will have different amount of ventilation.















40 CASEMENT WINDOWS SERIES

Profile wall thickness 2.0mm, 1.4mm and 1.2mm. Frame section width 40mm, glazed panel section width 65mm. Frame extension design is optional and it could be either outside or inside. It is non-thermal break aluminum casement windows, width range for opening panel is 400-850mm and its height is recommended to be no more than 1500mm







55 BROKEN BRIDGE CASEMENT SERIES

Profile wall thickness 1.4mm, frame section width 55mm, opening panel section width 70mm, 45 degree joint, frame extension optional. Thermal break profiles, excellent at heat and noise insulation. Width range for opening panel is 500-850mm and height 1200-1800mm







70 BROKEN BRIDGE CASEMENT SERIES

Profile wall thickness 1.4mm, frame section width 70mm, opening panel section width 78mm, 45 degree joint, frame extension optional. Thermal break profiles, excellent at heat and noise insulation. Width range for opening panels is 500-850mm and height 1200-1800mm





80 WINDOW WITH BUILT IN MOSQUITO NET PANEL DESIGN


Profiles wall thickness 1.4mm. Frame section width 80mm, glazed panel section width is either 78 mm. There is one glazed panel outside and one mosquito net panel inside. There is small handle inside, durable, and easy to operate. Width range for glazed panels is 500-850mm and height no more than 1800mm





108 BRIDGE BROKEN AND WINDOW SCREEN INTEGRATED SERIES

Profiles wall thickness is 1.4mm, the window frame thickness is 108mm, and the window sash is 70mm, 78mm, and 80mm. The diamond mesh fan can be opened inside and the glass fan can be opened outside. The external fan can only be equipped with a diagonal handle. The net width of the opening fan is not more than 500-900mm, and the height is not more than 1800mm

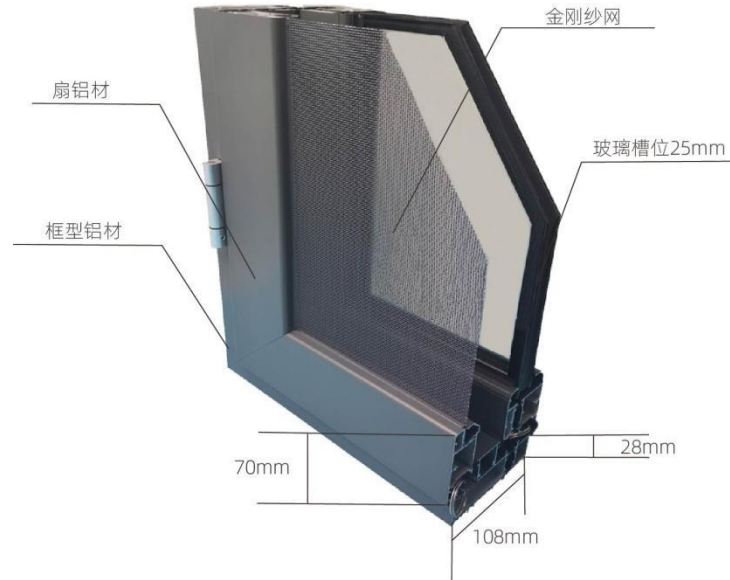
















72 SLIDING WINDOW SERIES


Profile wall thickness 2.0, 1.4 and 1.2mm. Frame section width 72mm, glazed panels section width 65mm. Frame extension is optional, either inside or outside. Net panel can be inside or outside. Opening style can be two glazed panels sliding, one glazed panel sliding or four glazed panels with the middle sliding. Width range for glazed panels is 400-1200mm and height no more than 1800mm

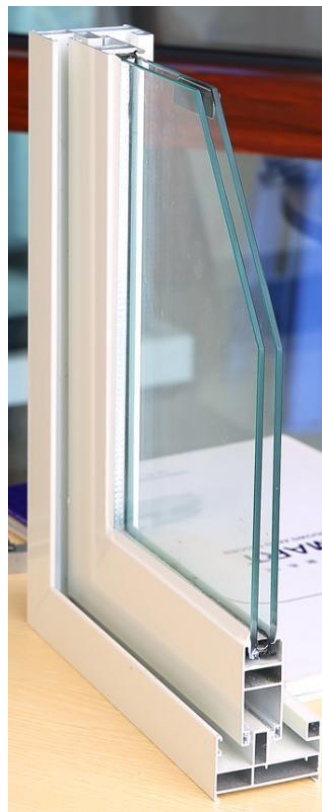





85 THREE TRACK SLIDING WINDOWS SERIES

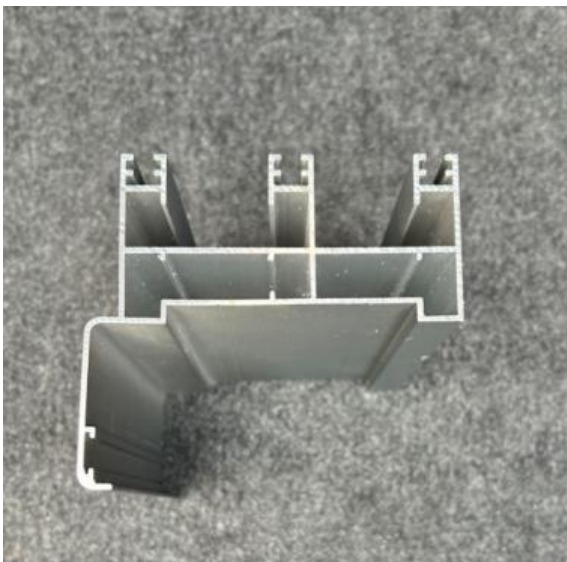





80 TWO TRACK SLIDING DOOR SERIES

Profiles wall thickness 1.4 or 1.6mm.
Frame section width is 80mm and
glazed panel section width is 72mm. It
looks nice and opens smoothly. Width
range for glazed panel is 800-1500mm
and height 1800-2400mm




126 THREE TRACK SLIDING DOOR SERIES

Profiles wall thickness 1.4 or 1.6mm. Frame section width 126mm, glazed panel section width 72mm. Thermal break profiles with built in mosquito net panel, which can be either inside or outside. Width range for glazed panels is 700-1200mm and height 2000-3000mm






低平轨

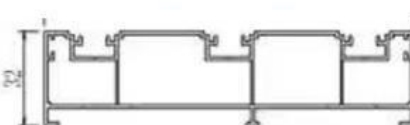


高平轨

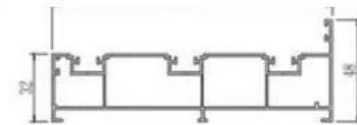


高平轨带挡水边

120 TWO TRACK SLIDING DOOR
SERIES

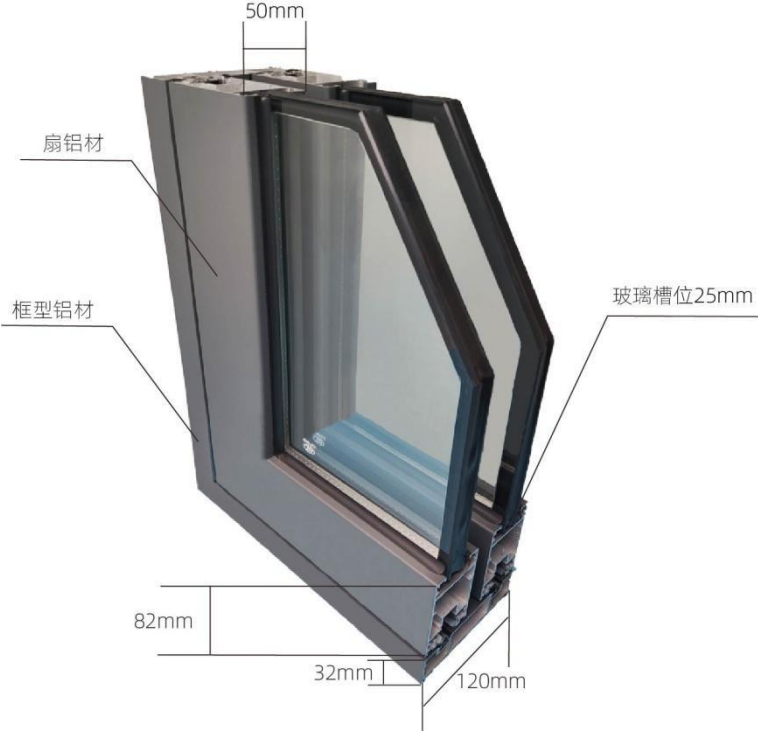





190 THREE TRACK SLIDING
DOOR SERIES

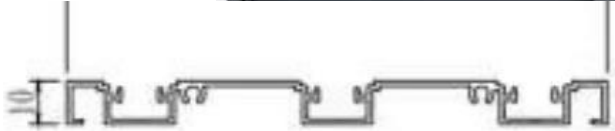


低平轨

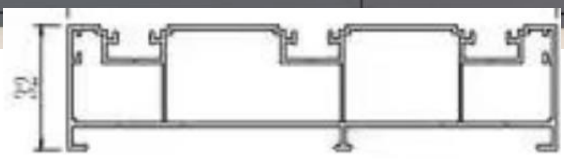


高平轨

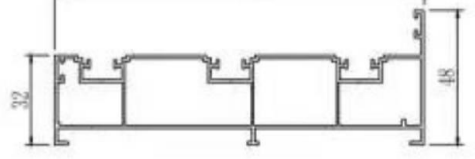

高平轨带挡水边

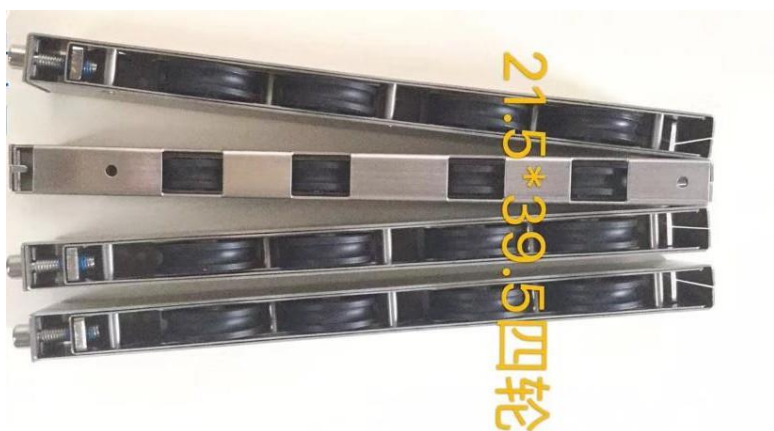



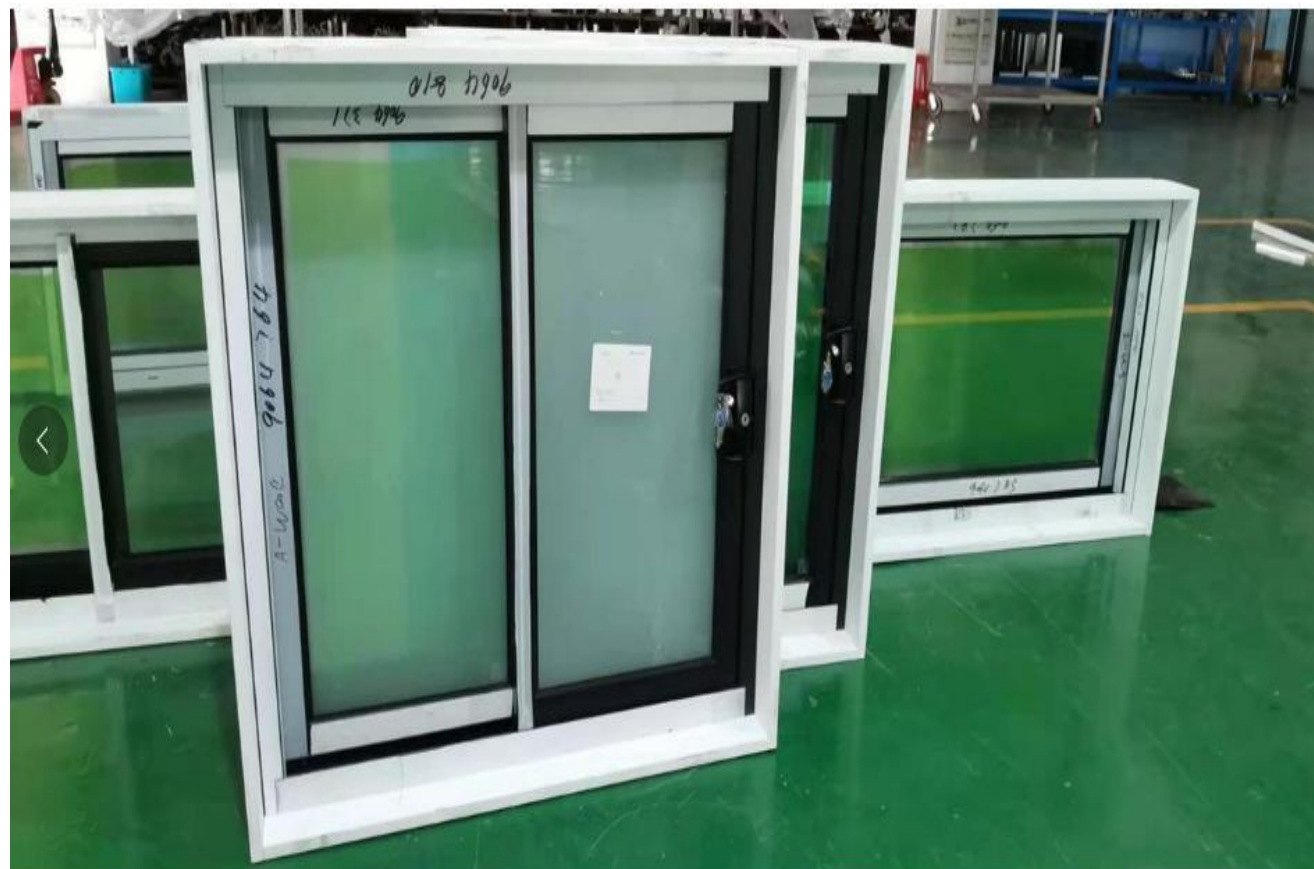

AUSTRALIAN SWING WINDOW SERIES









83 AMERICAN SINGLE/DOUBLE SLIDING WINDOW SERIES









室外

室外贝子 (旋钮)

室外锁匙

室外锁匙



室内锁匙

室内贝子 (旋钮)

室内锁匙

室内













100 FLOOR SPRING DOOR SERIES








100 MIDDLE SLIDING DOOR SERIES





100 FIXED WINDOW SERIES




84 HIDDEN FRAME CURTAIN WALL SERIES

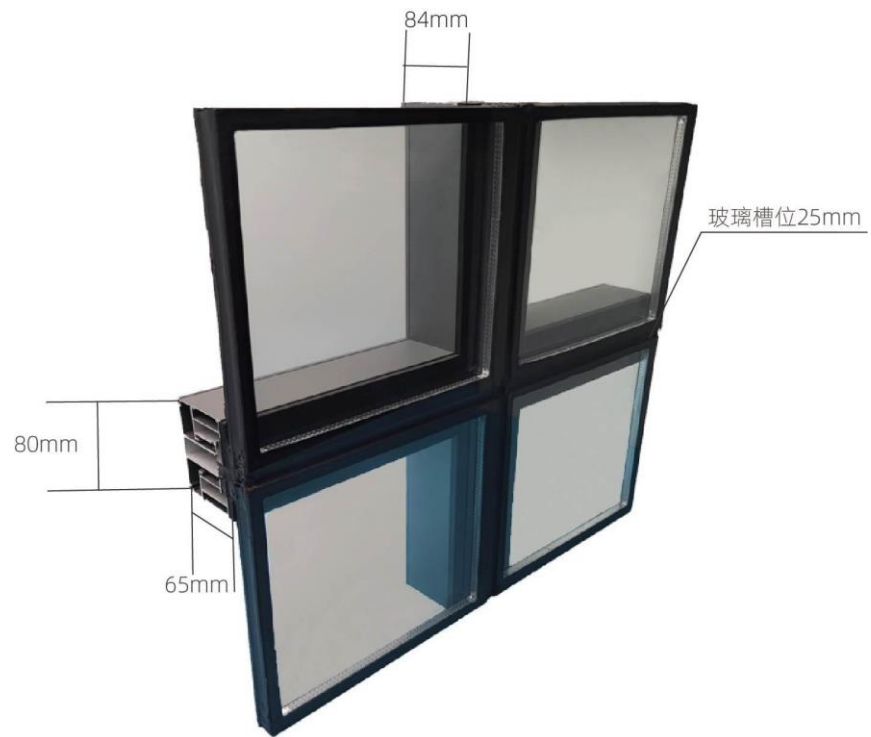


130 EXPOSED FRAME CURTAIN WALL SERIES

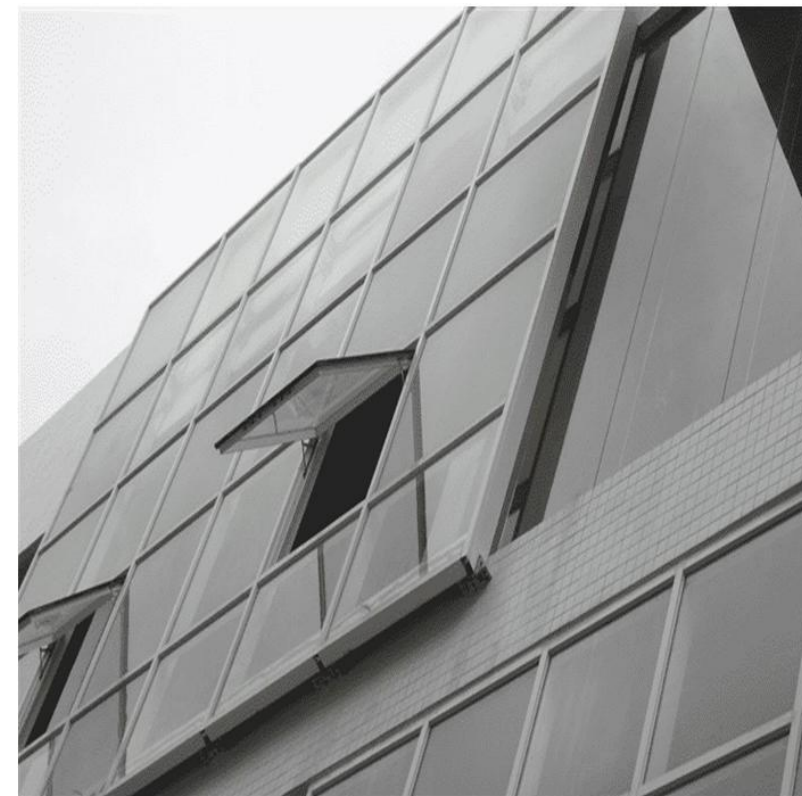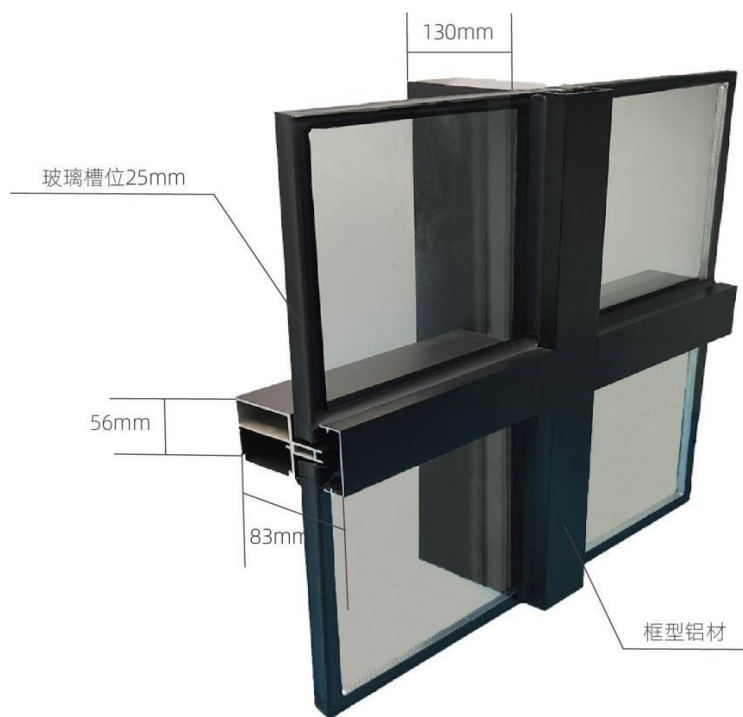




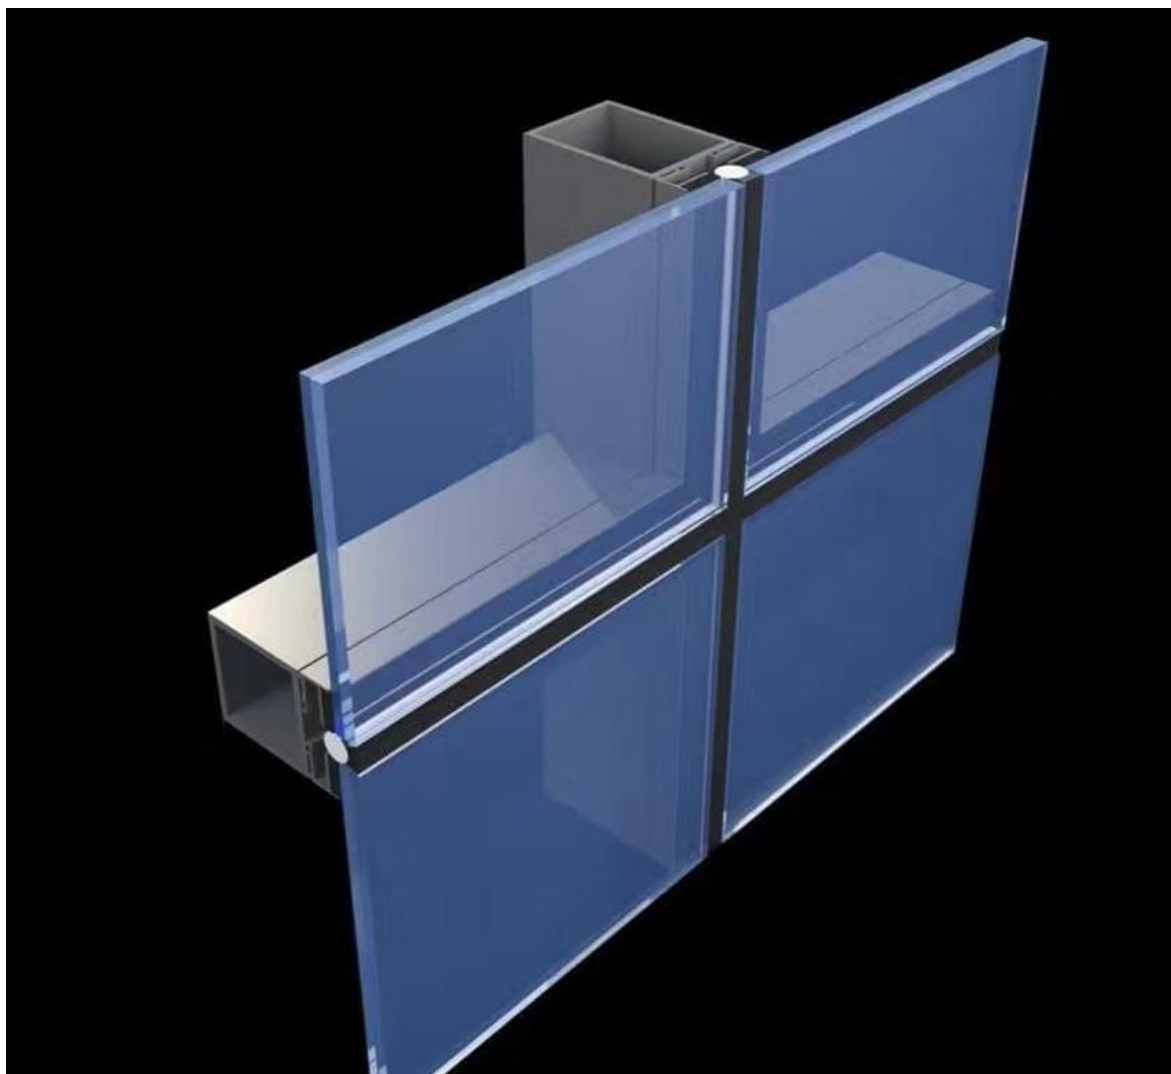

130 HIDDEN FRAME CURTAIN WALL SERIES

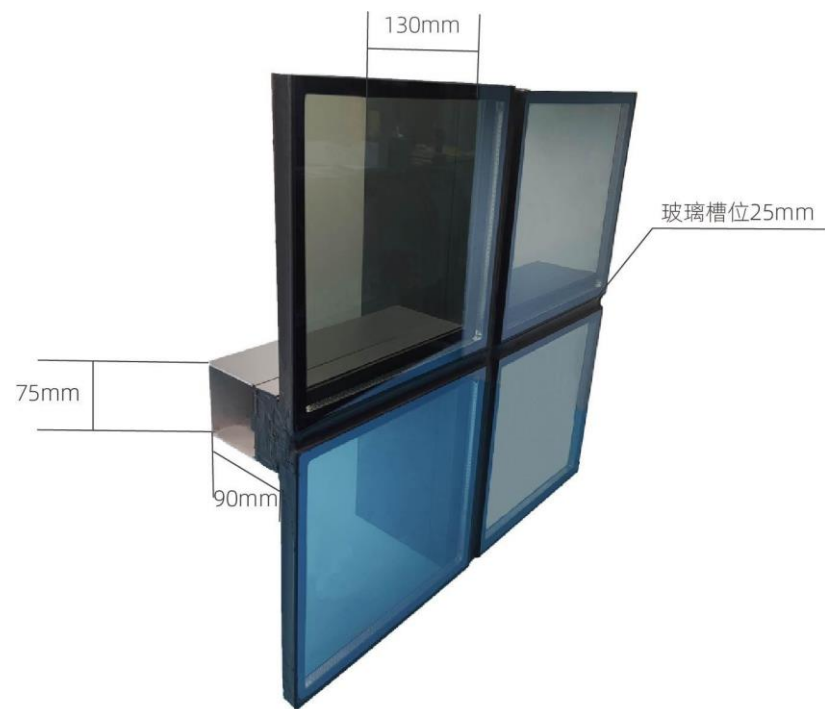



ARC WINDOW SERIES



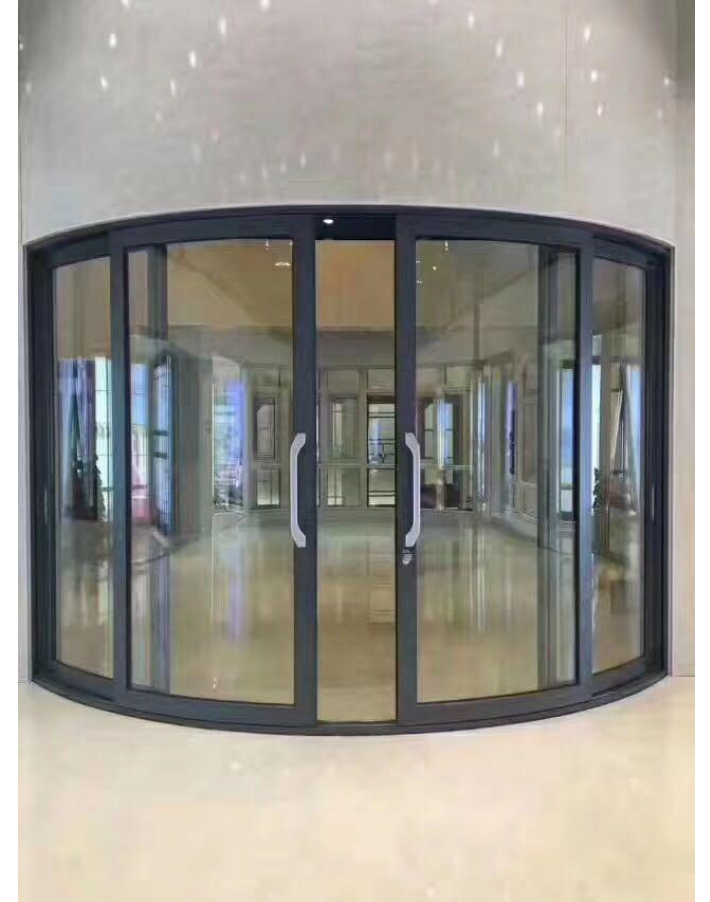








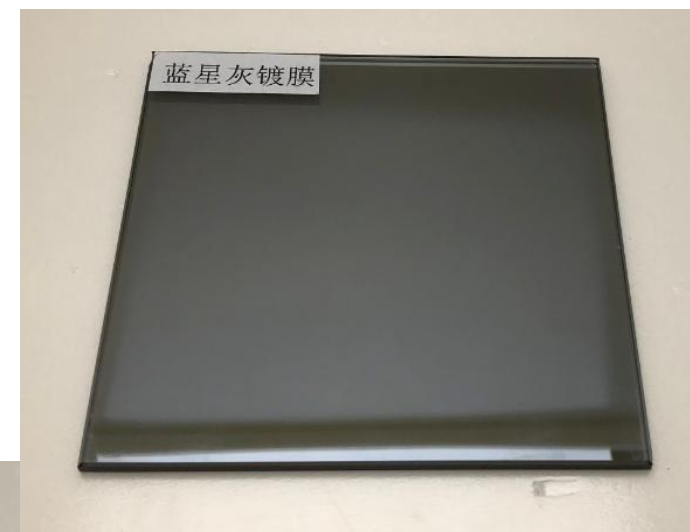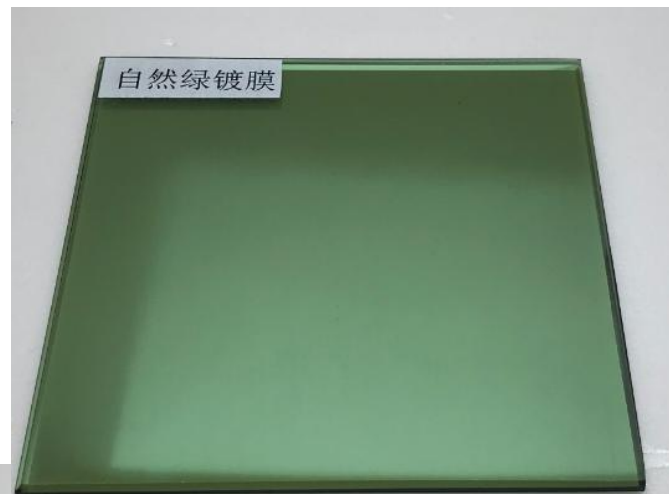

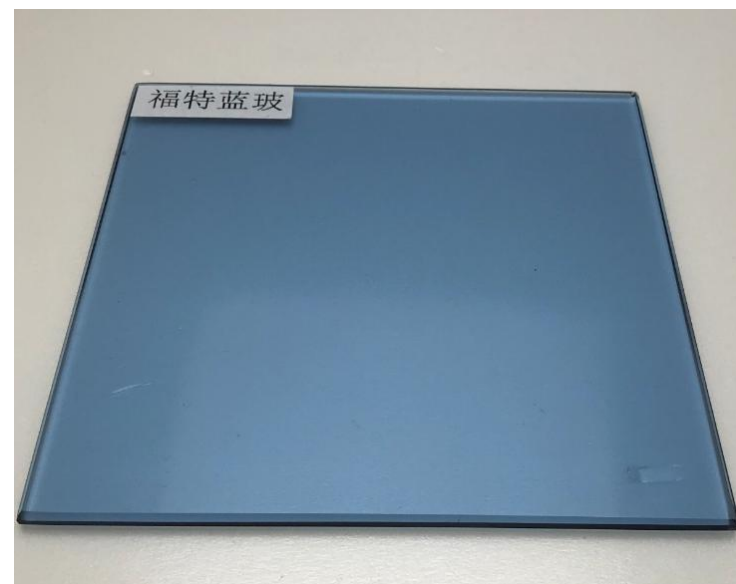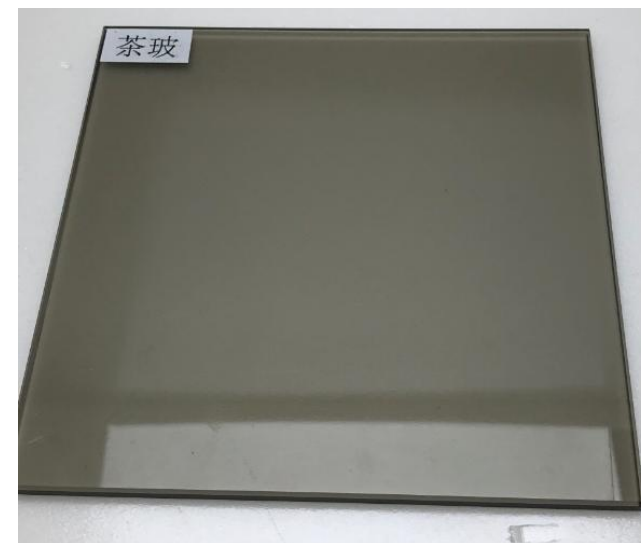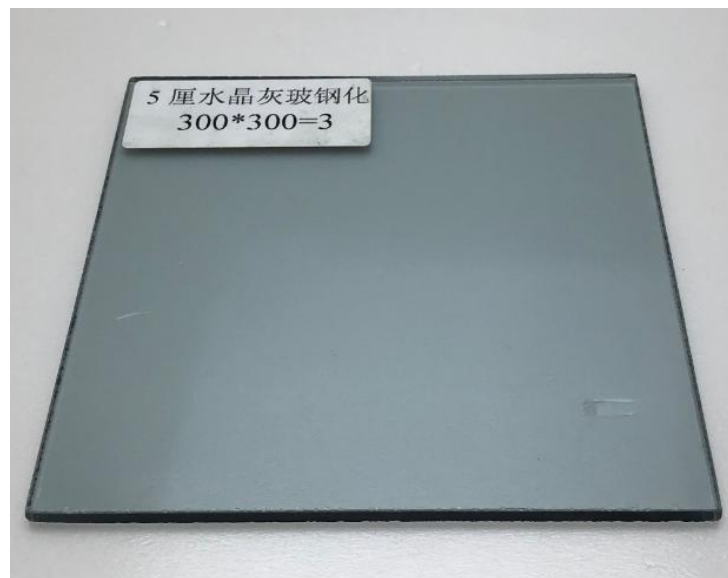



PACKING METHOD









